

**FIG. 3**

# THE 2025 RELEASE

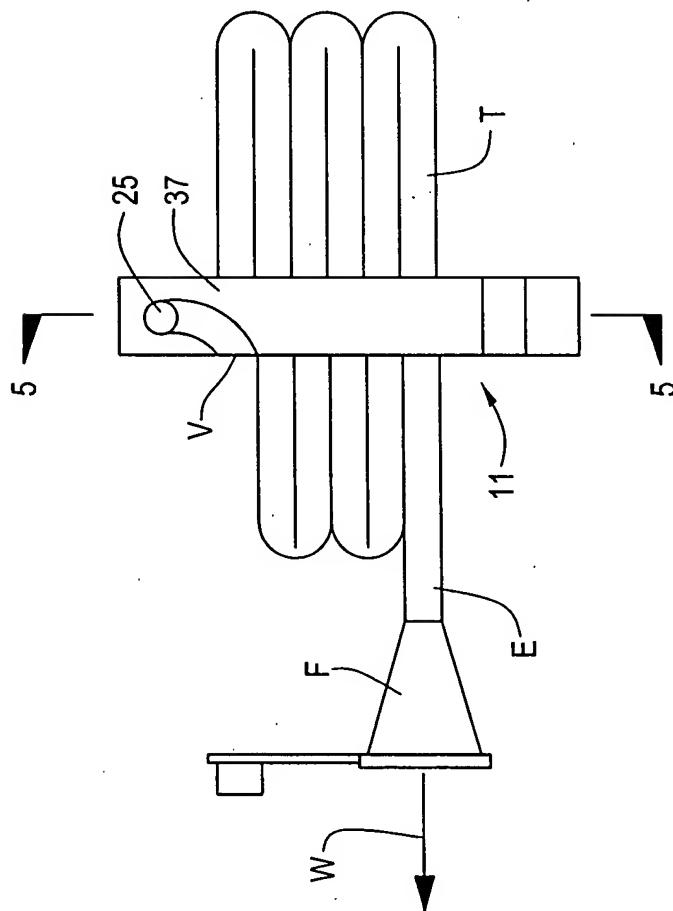


FIG. 4

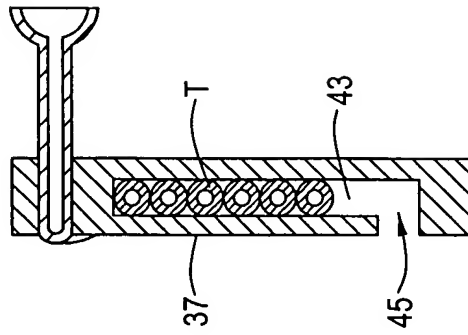


FIG. 5



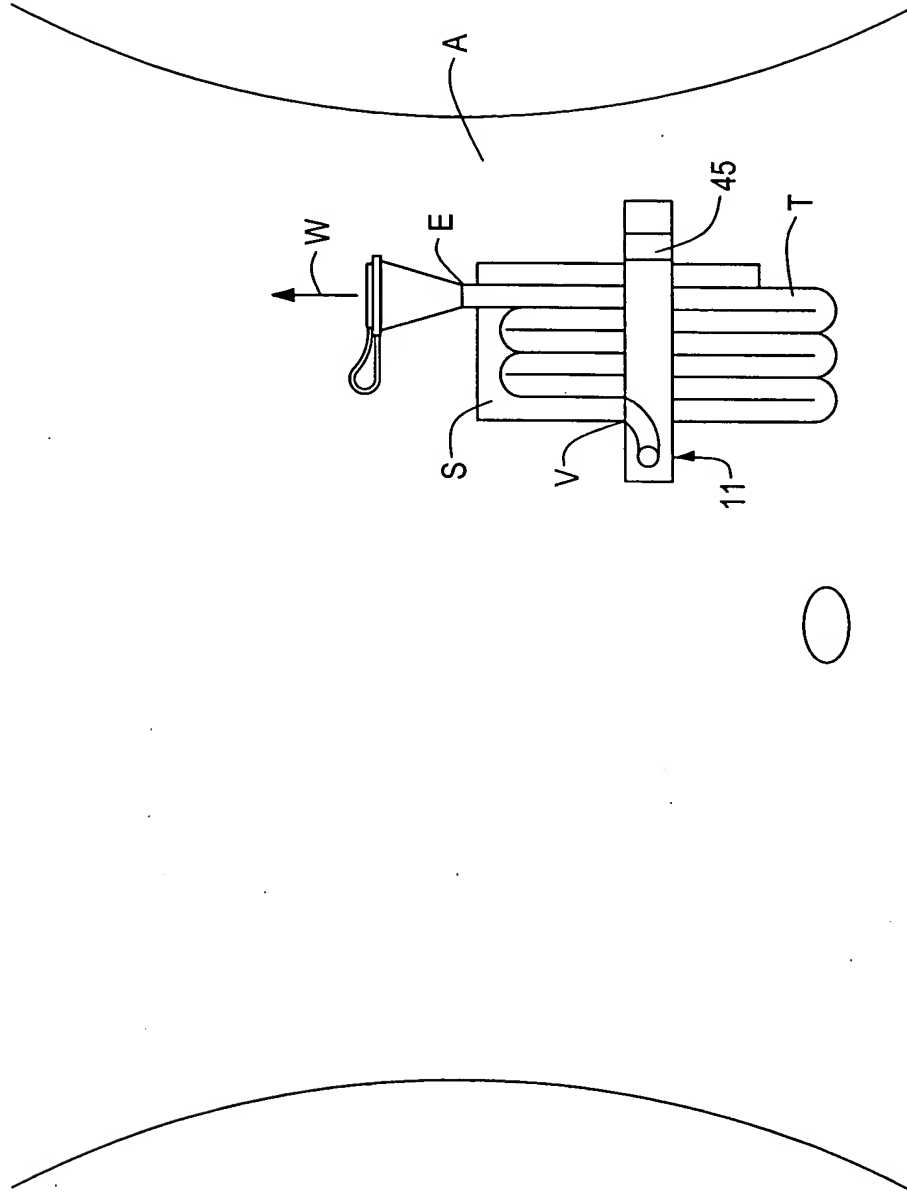


FIG. 6


4/7

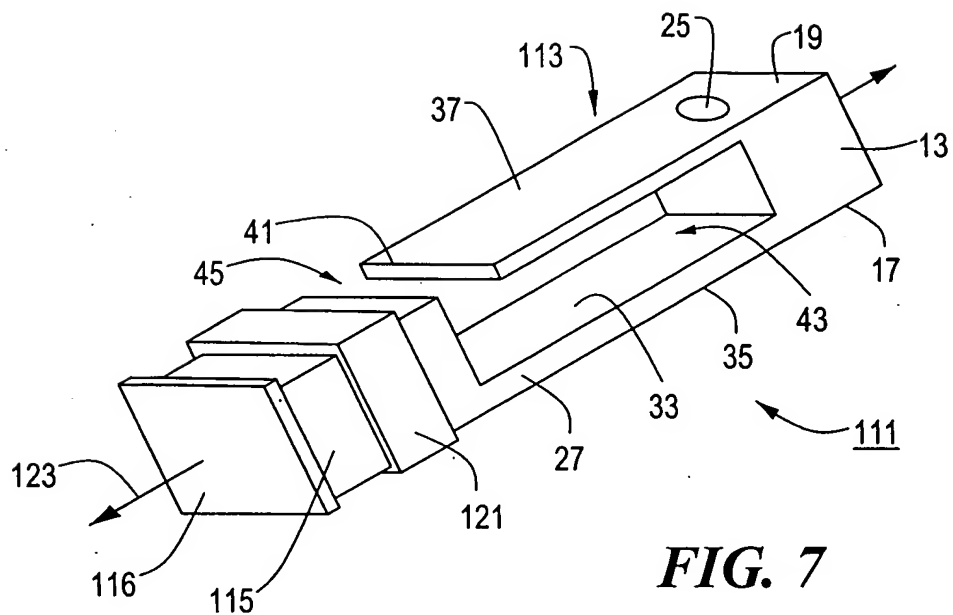


**FIG. 7**

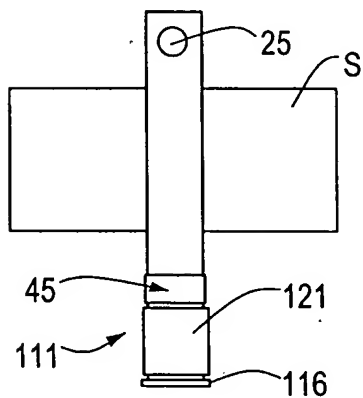

**FIG. 8**

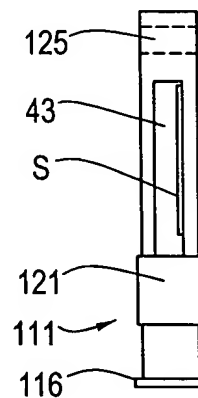

**FIG. 9**

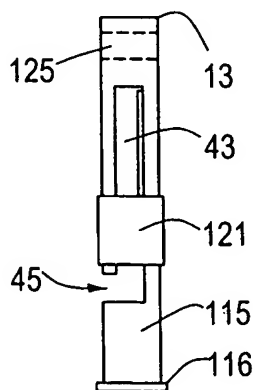

**FIG. 10**


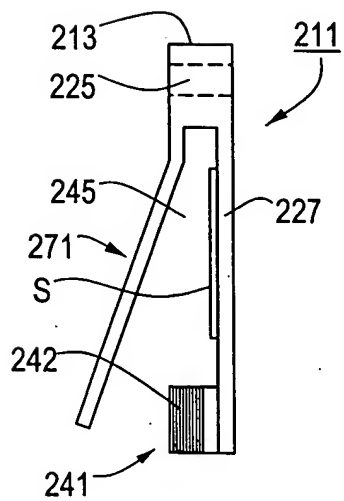
[illegible]


FIG. 1 is a schematic diagram of a circular device 11. A vertical rectangular component 315 is positioned centrally within the circle. At the top of component 315 is a circular feature 25. A curved arrow 311 indicates a clockwise rotation of the device 11. The bottom of component 315 features two rectangular sections 313.

**FIG. 14**

**FIG. 13**

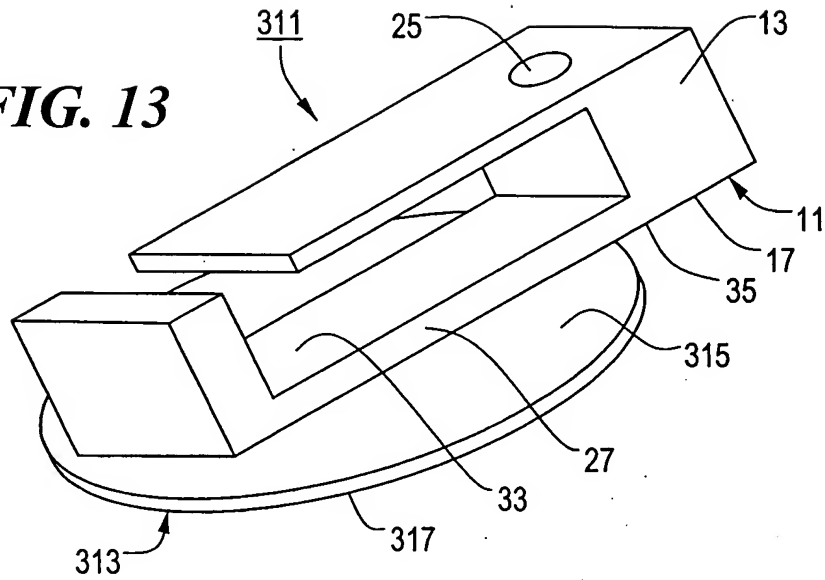

**FIG. 15**

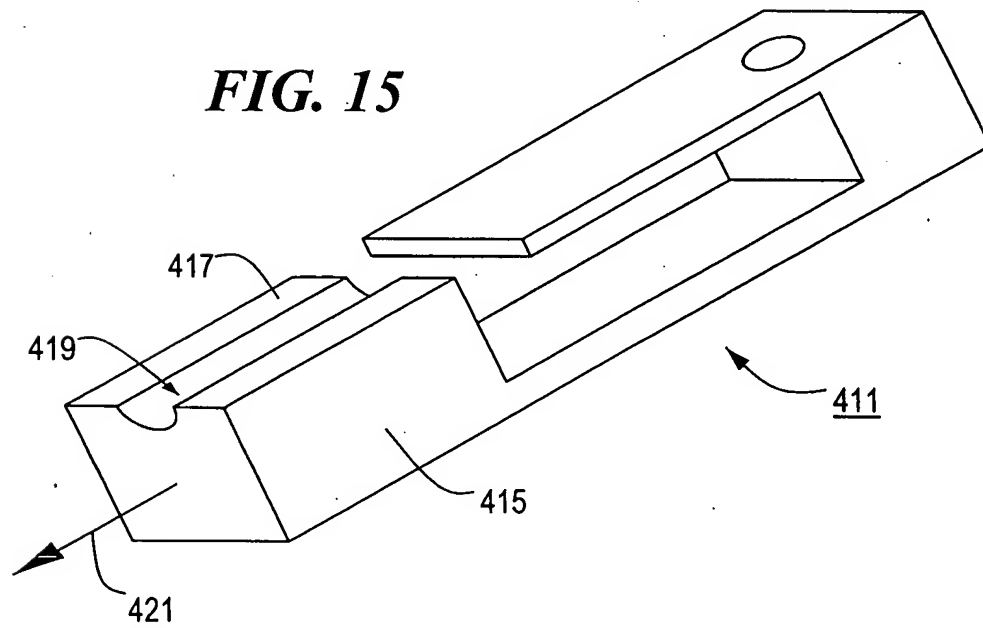

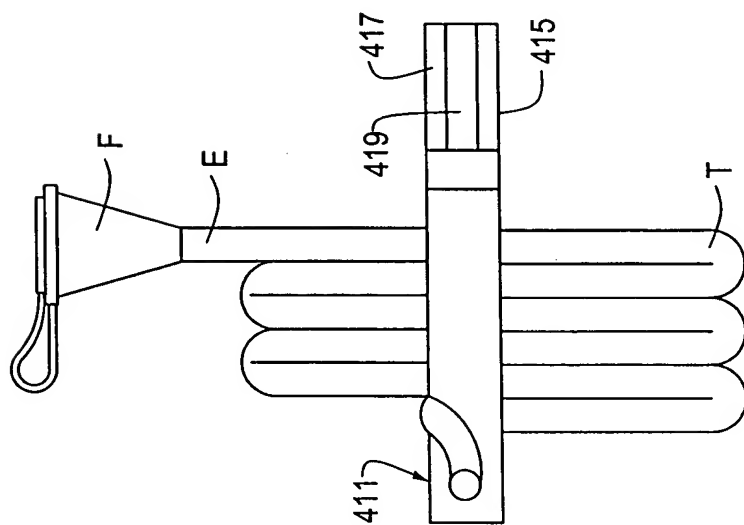


FIG. 16

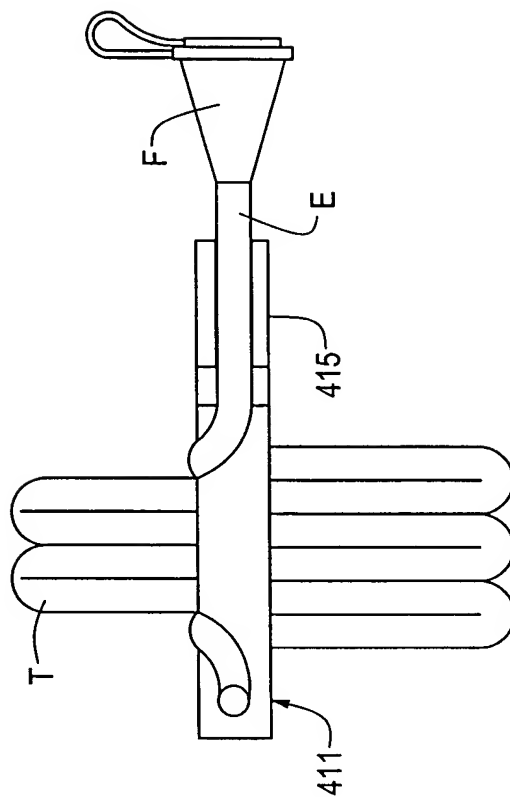


FIG. 17